


# GS™-2646

## Specifications

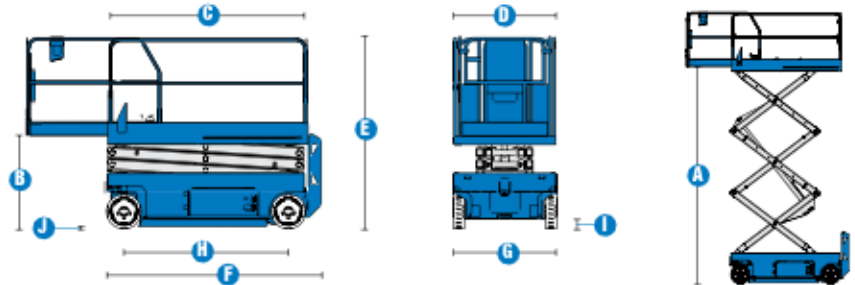

### MODELS GS™-2646

MEASUREMENTS	Metric
Working height maximum*	9.92m
<b>A</b> Platform height maximum	7.92m
<b>B</b> Platform height stowed	1.16m
<b>C</b> Platform length - outside	2.26m
extended	3.18m
Slide-out platform extension deck	0.91m
<b>D</b> Platform width - outside	1.15m
Guardrail height	1.09m
Toeboard height	0.15m
<b>E</b> Height - stowed: folding guardrails	2.26m
rails folded	1.68m
<b>F</b> Length - stowed	2.41m
extended	3.31m
<b>G</b> Width	1.17m
<b>H</b> Wheelbase	1.85m
<b>I</b> Ground clearance - centre	0.10m
<b>J</b> - with pothole guards deployed	0.02m

### PRODUCTIVITY

Maximum platform occupancy** - indoor	2
- outdoor	2
Lift capacity	454 kg
Lift capacity - extension deck	113 kg
Drive speed - stowed	3.5 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed***	30%
Turning radius - inside	zero
Turning radius - outside	2.29m
Raise / lower speed	30 / 38 sec
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tyres - solid non-marking	38 x 13 x 28 cm

### POWER

Power source	24V DC (four 6V 225 Ah batteries)
Hydraulic system capacity	14.2L

### WEIGHT\*\*\*\*

	1,974kg
--	---------

### STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2m to platform height.  
 \*\* CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

# GS™-2646

## Features

### STANDARD FEATURES

#### MEASUREMENTS

- **GS™-2646**
- 9.92 m working height
- Up to 454 kg lift capacity
  
- **PRODUCTIVITY**
- 2.26 m x 1.15 m steel platform
- 0.91 m extension deck
- Folding rails with full height swing gate
- Dual front wheel drive
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- Onboard diagnostic system
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Drive speed interlock
- Swing-out component tray
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm



#### POWER

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20 amp smart charger

---

**Distributed by:**