



Electric Self-Propelled Scissor Lift

GS™-2632

Its narrow width allows access in hard-to-reach spots. Fits through a standard doorway.



Genie Australia
GENIE MEANS MORE THAN LIFTING

GS-2632

- 90 degree steering provides zero turning radius and **excellent manoeuvrability**.
- Single door access 81.3 cm (32 in)
- On-board troubleshooting diagnostics **notify the operators of fault conditions**.
- Variable speed motor **extends battery and motor life** by using only the energy needed to do the required work.
- Weather resistant, impact resistant, molded **Joystick Controller box** operates from the platform or the ground.
- The solid steel deck platform has a **slip-resistant surface**.

▪ Heavy duty square steel guardrails fold down quickly without tools for **single door access**.

- **Low noise level** allows operation in quiet work environments.
- Swing-out battery box and power module allow **easy access to componentry**.
- Lubrication-free, **service-free pivot points**.

Standard Features


- GS-2632 has 9.92 m (32 ft) working height
- 1 m (39 in) roll-out platform extension
- Compact 81.3 cm (32 in) width
- 227 kg (500 lb) lift capacity
- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency Stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour meter

Options and Accessories

- Motion alarm
- Dual flashing beacons
- Power inverter
- Automotive horn
- Platform swing gate
- Maintenance-free batteries
- Air line to platform
- EE rating

Standards Compliance

- ANSI/SIA A92.6
- CE compliance option
- AS 1418.10
- CSA CAN3-B354.2-M82

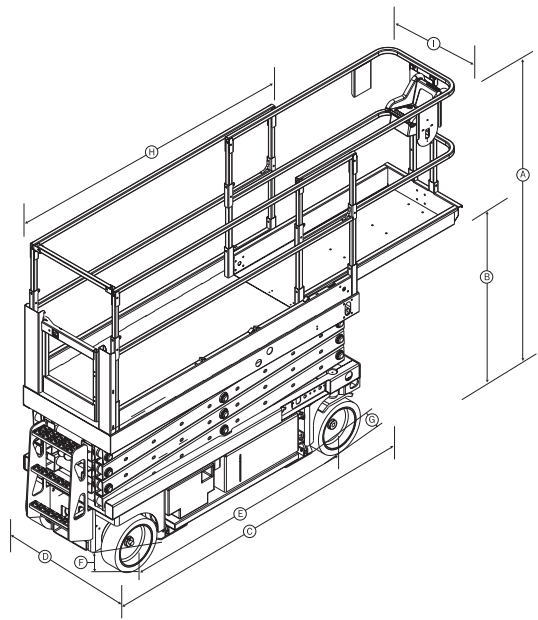

Specifications

Model GS-2632

	Metric	US
Working height*	9.92 m	32 ft
Platform height	7.92 m	26 ft
(A) Height stowed	2.29 m	90 in
Height stowed, rails folded	1.73 m	68 in
(B) Platform height - stowed	1.17 m	46 in
(C) Length - stowed	2.44 m	96 in
Length - platform extended	3.43 m	135 in
(D) Width	81.3 cm	32 in
(E) Wheelbase	1.85 m	73 in
(F) Ground clearance - at machine centre	10.2 cm	4 in
(G) Ground clearance - pothole guards deployed	2.2 cm	7/8 in
(H) Platform length	226 cm	89 in
Platform length extended	325 cm	128 in
(I) Platform width	79 cm	31 in
Toeboard height	15 cm	6 in
Lift capacity	227 kg	500 lb
Extension deck lift capacity	113 kg	250 lb
Turning radius inside	na	na
Turning radius outside	2.34 m	92 in
Power source	24V (4-6V, 245AH batteries)	
Drive speed - stowed	3.5 kph	2.2 mph
Drive speed - raised	0.8 kph	0.5 mph
Raise/lower speed	37/24 sec	
Controls	24V DC proportional	
Tyres (solid rubber, non-marking)	38.1 x 12.7 cm	15 x 5 in
Gradeability	25%	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Weight** - CE/AS	2,504 kg	5,520 lb

*The working height adds 2 m to platform height. Imperial adds 6 ft to platform height.

**Certain options and/or country standards will increase weight.

Distributed By:

Genie Industries™

GENIE AUSTRALIA

591 Boundary Road, Darra Qld 4076
 PO Box 394, Richlands Qld 4077
 Telephone **07 3375 1660**
 Fax 07 3375 1002
 www.genielift.com

GENIE UNITED STATES

18340 NE 76th Street
 P.O. Box 97030
 Redmond, Washington 98073-9730
 Telephone **(425) 881-1800**
 Toll Free in USA/Canada **800-536-1800**
 Fax (425) 883-3475 www.genielift.com