

MANIACCESS

■ **100 SC**
120 SC










Self-propelled rough terrain scissor lift








- Working height: 9.92 to 11.75 m
- Platform height: 7.92 to 9.75 m
- S.W.L.: 567 kg (100 SC)
454 kg (120 SC)
- Extension of the platform: 1.10 m
- Platform size: 2.51 m x 1.55 m
- Diesel Engine 25 HP
- 4 wheel drive
- Brake on 4 wheels
- Proportional controls

100 SC / 120 SC

	100 SC	120 SC
 Working height.....	9.92 m	11.75 m
 Platform height	7.92 m	9.75 m
 S.W.L.....	567 kg	454 kg
 Occupancy of platform (int/ext).....	4/4	4/2


 Max. wind speed (for external use)	45 km/h
 Platform dimensions.....	2.51 x 1.55 m



 ① Width.....	1.73 m
 ② Length (with stab).....	3.43 m
 ③ Length (with extension)	4.19 m
 ④ Height.....	2.32 m 2.57 m
 ⑤ Height rails lowered	1.70 m 1.83 m


 ⑥ Ground clearance.....	0.20 m
 ⑦ Wheelbase	1.85 m
 Inside turning radius.....	1.52 m
 Outside turning radius.....	3.68 m
 Working speed	0.8 km/h
 Travelling speed	6.1 km/h
 Speed (raise/lower)	30/35 s 40/37 s

 IC Engine.....	Kubota D-1105 - 25 hp
--	-----------------------

 Gradeability on rough terrain	35 % 30 %
---	--------------

 Hydraulic tank.....	62.5 l.
 Diesel tank	56.8 l.

 Foam filled tyres	26x12x380
 4 wheel drive / 2 wheel steer	




 Weight.....	3751 kg 4259 kg
 with foam filled tyres, with stab.	

Standard equipments

- Automatic levelling stabilizers
- Proportional controls
- Foam filled tyres
- Non slippery floor deck
- Swing gate for easy access to platform
- Folding guardrails
- On board diagnostic
- Removable control box
- 230 V predisposition
- Horn
- Audible and visual tilt and overload alarm
- Lowering alarm
- Descent alarm

Options

- Airline predisposition
- Working lights
- Non marking tyres
- Biodegradable oil
- Flashing beacons

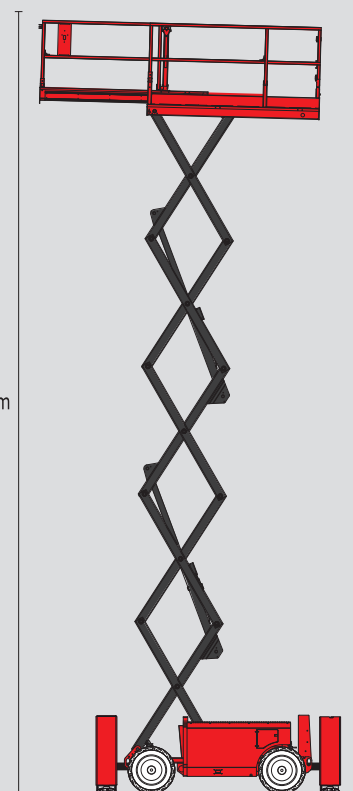

100 SC : 9,92 m
120 SC : 11,75 m

100 SC : 7,92 m
120 SC : 9,75 m

The indicated specifications are not binding on the maker and may be modified without notice. The Manitou trucks presented in this brochure may be fitted with optional items of equipment.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700444EN_A_1010_100SC_120SC.qxd

